

RESOLUTION NO. 10732

MOVED BY COUNCILPERSON: Arnone

CITY OF JOHNSTOWN, CAMBRIA COUNTY, PENNSYLVANIA

**A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF JOHNSTOWN, CAMBRIA COUNTY, PENNSYLVANIA AUTHORIZING THE CITY MANAGER TO SIGN ALL DOCUMENTS NECESSARY TO REPLACE THE ROOF AT THE PUBLIC SAFETY BUILDING LOCATED AT 401 WASHINGTON STREET WITH THE DURO LAST ROOFING SYSTEMS INSTALLED BY UMBRELLA ROOFING SYSTEMS.**

**WHEREAS**, the City of Johnstown would like to replace the current roof at the Public Safety Building at 401 Washington Street; and

**WHEREAS**, the City of Johnstown received a quote from Umbrella Roofing a Duro Last Roofing installer under the TIPS contract; and

**WHEREAS**, Umbrella Roofing a Duro Last Roofing installer gave a quote of \$203,574.11 this quote does not include any allowances for roof deck replacement or other hidden damages; and

**WHEREAS**, the removal of the old roof and installation of a new roof would be taken from the ARPA Account # 28-466-28-600-00

**NOW, THEREFORE, BE IT RESOLVED**, the City Council of the City of Johnstown hereby authorizes the City Manager and/or his designee to sign all documents and take all actions necessary to proceed with the removal and installation of the roof at the Public Safety Building at 401 Washington Street.

RESOLUTION SECONDED BY COUNCILPERSON: Mock

Roll Call:

Janakovic			Arnone			Britt			Clark			Huchel			King			Mock		
Y	N	A	Y	N	A	Y	N	A	Y	N	A	Y	N	A	Y	N	A	Y	N	A
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**ADOPTED: November 12, 2025**

**ATTEST:** I do hereby certify the foregoing is a true and correct copy of resolution No 10732, as the same by the City Council of the City of Johnstown, Pennsylvania.

Frank Janakovic  
Frank Janakovic, Mayor or Rev. Sylvia King Dep. Mayor

Arturo Martynuska  
Arturo Martynuska, City Manager



October 29, 2025

Carmen Trucello  
Fleet Manager and Mechanic  
City of Johnstown PA  
401 Main Street  
Johnstown, PA 15901  
Tel: (814) 539-2504  
Cell: (814) 242-4341  
[ctrus@johnstownpa.gov](mailto:ctrus@johnstownpa.gov)

Re: Duro-Last Roofing Project for the City of Johnstown Public Safety Building

Dear Mr. Carmen Trucello:

AMRIZE BUILDING ENVELOPE LLC d/b/a DURO-LAST ROOFING has developed the following pricing proposal to re-roof the City of Johnstown Public Safety Building located in Johnstown, PA. This pricing proposal was developed using Duro-Last's contract number 210205 with The Interlocal Purchasing System (TIPS) and includes the total cost to purchase and install the Duro-Last roofing system.

Duro-Last will provide the Duro-Last roofing system and its installation to the City of Johnstown at RS Means pricing using the Johnstown City Cost Index.

Installation of the Duro-Last Roofing System will be provided by Umbrella Roofing Systems of Ellwood City, Pennsylvania, an authorized Duro-Last contractor who has achieved Elite Contractor status with Duro-Last based on their quantity and quality of commercial installations.

Attached is the Duro-Last Roofing specification which defines the work that Duro-Last Roofing proposes to complete. When the installation is complete, a Duro-Last Roofing Technical Representative will inspect the installation for completeness and conformity to Duro-Last Roofing specifications. Following acceptance of the roof, Duro-Last Roofing will issue a warranty to the City of Johnstown.

The Duro-Last Roofing 20-year NDL warranty provides for the repair or replacement of the roofing system, and the labor to install it, in the event of a defect in the Duro-Last Roofing products. The 20-year NDL warranty does have an additional charge to obtain it, which has been included in the proposal. The warranty also does not provide coverage of consequential damages resulting from leaks caused by any defects covered under the warranty.



Based on this scope of work, pricing for Duro-Last Roofing to complete the City of Johnstown Public Safety Building re-roofing project is \$203,574.11.

This proposal's pricing will be honored if the project is awarded and materials are ordered by March 2, 2026. Proposal pricing is subject to change after this date.

Duro-Last Roofing will invoice the City of Johnstown for materials shipped and 30% mobilization upon initial shipment. Duro-Last Roofing will invoice monthly for additional materials shipped and completed labor. Invoices are to be paid without set-off within 30 days from the invoice date. Failure to pay on time constitutes a breach of contract. Past due amounts will incur interest at 1.5% per month and Duro-Last Roofing may, in its sole discretion, stop work, demobilize, terminate the contract, or any combination of measures. The City of Johnstown is responsible for all collection costs, including attorneys' fees.

Notwithstanding the above referenced base price, all non- Duro-Last Roofing materials, including any third-party materials purchased for the project, will be invoiced by Duro-Last Roofing to the City of Johnstown at the market price paid by Duro-Last Roofing at time of payment to any such third-party supplier.

This proposal's pricing includes up to one site visits by Duro-Last Roofing personnel to confirm the installation meets the project's specification.

Any alterations or deviation from the scope of work involving extra costs including, but not limited to, additional materials and labor will be executed only upon written change-orders submitted to Duro-Last Roofing which will result in an extra charge over this proposal.

The base price does not include any allowances for roof deck replacement or for other hidden damages.

Prevailing Wages do apply.

The building owner is responsible for obtaining any necessary permits, engineering fees, or tests needed to meet state and local codes.

The base price includes performance and payment bonds. Any bonds for this project shall only apply for a one-year maintenance period commencing on the date of substantial completion of the project. Bond coverage shall not be extended to the 20-year warranty period subsequent to the one-year maintenance period.

Duro-Last Roofing and Umbrella Roofing are not responsible for the following:

- HVAC alteration and related utility work
- Lightning, lightning protection, or electrical alterations or recertification
- Satellite dishes or antenna recalibration
- Removal of material containing asbestos or asbestos testing
- Ponded water due to previous existing substrate conditions

All material is guaranteed to be as specified. All work will be completed in a workmanlike manner according to standard roofing practices and in accordance with Duro-Last Roofing published specifications. Duro-Last Roofing shall not be responsible for delays relating to weather, accidents, or other events beyond our control.

If this proposal is accepted, the Duro-Last Roofing TIPS price schedule, terms, and conditions will be applied. In addition:

1. The City of Johnstown's TIPS membership will need to be verified.
2. A purchase order and tax-exempt certificate will need to be issued to Duro-Last Roofing.
3. The purchase order should be clearly marked "Per TIPS Contract".
4. E-mail the purchase order in PDF format to TIPS at [tipsbo@tips-usa.com](mailto:tipsbo@tips-usa.com) for review and approval.
5. Duro-Last Roofing will issue a Notice to Proceed to Umbrella Roofing after receiving the approved purchase order from TIPS.

If you have any questions regarding this proposal, please contact me at (800) 248-0280 ext. 2232 or [marrea.hammond@amrize.com](mailto:marrea.hammond@amrize.com). If this proposal is acceptable, please sign below and return with the aforementioned documents.

**The City of Johnstown Public Safety Building Re-Roofing Project:**

- Base Price: \$203,574.11

Approved By: \_\_\_\_\_

Title: \_\_\_\_\_

Date: \_\_\_\_\_

Best Regards,



*Marrea Hammond*

Marrea Hammond  
Cooperative Purchasing Representative  
Duro-Last Roofing


cc: Brian Ralph, Umbrella Roofing Systems Inc.

# City of Johnstown

PUBLIC SAFETY BUILDING

401 Washington St  
Johnstown, PA 15901

Prepared for: Brian Ralph | Umbrella Roofing Systems, Inc.  
Prepared by: Marrea Hammond | Duro-last Division of Amrize

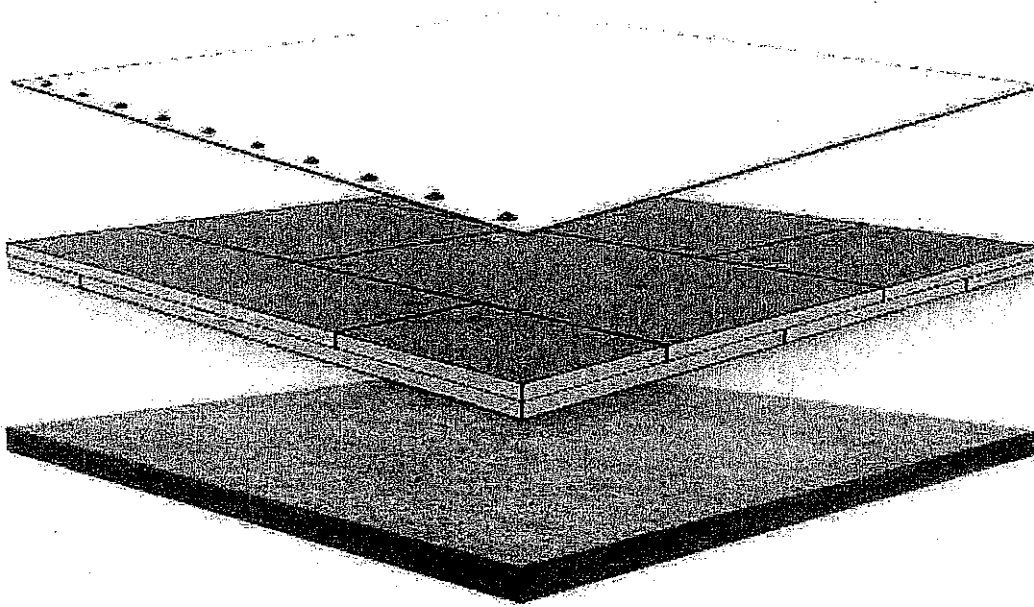

## PART 1 GENERAL

### 1.1 SUMMARY

- A. Membrane Type: Duro-Last 50-mil Membrane (Custom Fab: Regular Rolls)
  - 1. Roll Width: 60" (Installed widths may vary)
  - 2. Membrane Color: White
  - 3. Attachment Type: Mechanically Fastened
- B. Insulation Assembly Type: Duro-Guard® ISO II (Fiber-Reinforced Facer)
  - 1. Board Application: Flat Stock
  - 2. Board Style: Min. Assembly R-Value

3. Board Size: 4' x 8'
  4. Thickness/R-Value: R-30
  5. Attachment Type: Mechanically Fastened
- C. Deck Type: Structural Concrete Deck
- D. Prefabricated flashings, corners, parapets, stacks, vents, and related details.
- E. Fasteners, adhesives, and other accessories required for a complete roofing installation.
- F. Traffic Protection.

### **Scope of Work provided by Umbrella Roofing Systems**

1. Remove EPDM, 2 1/2" of roof insulation and all components associated with the EPDM roof to roof deck. All debris must be craned off of roof due to height of building
2. Existing asphalt vapor barrier to remain on roof deck. Mechanically attach 2 layers of 2.6" ISO to roof deck, staggering joints between layers
3. Mechanically attach 50 mil white material to roof deck.
4. Mechanically attach parapet material to walls. 7" compression metal on back wall only
5. Term bar termination in inside of parapet wall, just below decorative terra cotta coping on remaining 3 walls
6. 30" x60" safety stripe walk pads at roof door access, under satellite dish and under wood supports

### **1.2 REFERENCES**

#### **A. ASTM INTERNATIONAL (ASTM)**

1. (2019) Standard Test Methods for Coated Fabrics (D751)
2. (2021) Standard Specification for Poly(Vinyl Chloride) Sheet Roofing (D4434/D4434M)
3. (2022) Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board (C1289)
4. (2020) Standard Test Methods for Fire Tests of Roof Coverings (E108)
5. (2020) Standard Test Methods for Fire Tests of Building Construction and Materials (E119)

#### **B. UL SOLUTIONS (UL)**

1. (2021) UL Roofing Systems (TGFU.R10128)

#### **C. AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)**

1. (2014) Minimum Design Loads for Buildings and Other Structures (ASCE Standard - ASCE/SEI 7-10)
2. (2017) Minimum Design Loads and Associated Criteria for Buildings and Other Structures (ASCE Standard - ASCE/SEI 7-16)

3. (2022) Minimum Design Loads and Associated Criteria for Buildings and Other Structures (ASCE Standard - ASCE/SEI 7-22)

**D. NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA)**

1. (2019) NRCA Roofing Manual - Membrane Systems

**1.3 SYSTEM DESCRIPTION**

- A. **General:** Provide installed roofing membrane and base flashings that remain watertight; do not permit the passage of water; and resist specified uplift pressures, thermally induced movement, and exposure to weather without failure.
- B. **Material Compatibility:** Provide roofing materials that are compatible with one another under conditions of service and application required, as demonstrated by roofing membrane manufacturer based on testing and field experience.
- C. **Physical Properties (must meet or exceed):**
  1. Roof product must meet the requirements of Type III PVC sheet roofing as defined by ASTM D4434.
  2. Thickness: 50 mil, nominal, in accordance with ASTM D751.
  3. Thickness over Scrim:  $\geq 28$  mil in accordance with ASTM D7635.
  4. Breaking Strength:  $\geq 438$  lbf. (machine direction) and  $\geq 390$  lbf. (cross machine direction) in accordance with ASTM D751 Grab Method.
  5. Elongation at Break:  $\geq 31\%$  (machine direction) and  $\geq 31\%$  (cross machine direction) in accordance with ASTM D751 Grab Method.
  6. Seam Strength:  $\geq 417$  lbf. in accordance with ASTM D751 Grab Method.
  7. Tear Strength:  $\geq 132$  lbf. (machine direction) and  $\geq 163$  lbf. (cross machine direction) in accordance with ASTM D751 Procedure B.
  8. Low Temperature Bend: Pass at  $-40^{\circ}\text{F}$  in accordance with ASTM D2136.
  9. Heat Aging: Pass after being conditioned for 56 days in oven maintained at  $176^{\circ}\text{F}$  in accordance with ASTM D3045.
  10. Accelerated Aging: Pass after 10,000 hours of total test time in accordance with ASTM G155.
  11. Dimensional Stability: Change of  $-0.30\%$  (machine direction) and  $-0.45\%$  (cross machine direction) in accordance with ASTM 1204.
  12. Water Absorption:  $< 1.7\%$  at  $158^{\circ}\text{F}$  for 168 hours in accordance with ASTM D570.
  13. Static Puncture Resistance:  $\geq 56$  lbf. in accordance with ASTM D5602.
  14. Dynamic Puncture Resistance:  $\geq 14.7$  ft-lbf. in accordance with ASTM D5635.
- D. **Cool Roof Rating Council (CRRC) (Membrane must be listed on the CRRC website):**
  1. Solar Reflectance (Initial):  $\geq 86\%$
  2. Solar Reflectance (3-Year Aged):  $\geq 74\%$
  3. Thermal Emittance (Initial):  $\geq 89\%$



4. Thermal Emittance (3-Year Aged):  $\geq 89\%$
  5. Solar Reflectance Index (SRI) (Initial):  $\geq 108\%$
  6. Solar Reflectance Index (SRI) (3-Year Aged):  $\geq 91\%$
- E. Insulation:
1. General Requirements
    - a. Install using a minimum of two layers.
    - b. Configuration as indicated on the drawings.
  2. Duro-Guard® ISO II (Fiber-Reinforced Facer)
    - a. Min. Assembly R-Value: R-30

#### 1.4 SUBMITTALS

- A. Product data sheets to be used, with the following information included:
1. Preparation instructions and recommendations
  2. Storage and handling requirements and recommendations
  3. Installation methods
  4. Maintenance requirements
- B. Sustainability Documentation:
1. NSF/ANSI Standard 347 Certificate
  2. Type III product-specific Environmental Product Declaration
- C. Shop Drawings: Indicate insulation pattern, overall membrane layout, field seam locations, joint or termination detail conditions, and location of fasteners.
- D. Provide verification samples for each product specified (two samples representing each product, color and finish):
1. 4-inch by 6-inch sample of roofing membrane, of color specified.
  2. 4-inch by 6-inch sample of walkway pad.
  3. Termination bar, fascia bar with cover, drip edge, and gravel stop if to be used.
  4. Each fastener type to be used for installing membrane, insulation/recover board, termination bar and edge details.
- E. Installer Certification: Certification from the roofing system manufacturer that Installer is approved, authorized, or licensed by manufacturer to install roofing system.
- F. Manufacturer's warranties.

#### 1.5 QUALITY ASSURANCE

- A. Perform work in accordance with manufacturer's installation instructions.
- B. Manufacturer Qualifications: A manufacturer specializing in the production of standard reinforced PVC membranes systems and utilizing a Quality Control Manual during the

production of the membrane roofing system that has been approved by and is inspected by Underwriters Laboratories.

- C. **Installer Qualifications:** Company specializing in installation of roofing systems similar to those specified in this project and approved by the roofing system manufacturer.
- D. **Source Limitations:** Obtain components for membrane roofing system from roofing membrane manufacturer.
- E. There shall be no deviations from the roof membrane manufacturer's specifications or the approved shop drawings without the prior written approval of the manufacturer.

#### 1.6 REGULATORY REQUIREMENTS

- A. **Conform to applicable code for roof assembly fire hazard, wind uplift, and cool roof requirements.**
- B. **Fire Hazard Requirements:** Provide membrane roofing materials with the following fire-test-response characteristics. Materials shall be identified with appropriate markings of applicable testing and inspecting agency.
  - 1. **Class A**
  - 2. **Fire-test-response standard:** Comply with ASTM E108 for application and roof slopes indicated.
  - 3. **Fire-Resistance Ratings:** Comply with ASTM E119 for fire-resistance-rated roof assemblies of which roofing system is a part.
  - 4. **Conform to applicable code for roof assembly fire hazard requirements.**
- C. **Wind Uplift Requirements: Roofing System Design:** Provide a roofing system designed to resist uplift pressures calculated according to the current edition of ASCE/SEI 7, Minimum Design Loads and Associated Criteria for Buildings and Other Structures.

#### 1.7 PRE-INSTALLATION MEETING

- A. **Convene meeting not less than one week before starting work of this section.**
- B. **Review methods and procedures related to roof deck construction and roofing system including, but not limited to, the following:**
  - 1. **Meet with Owner, Architect, Owner's insurer if applicable, testing and inspecting agency representative, roofing installer, roofing system manufacturer's representative, deck installer, and installers whose work interfaces with or affects roofing including installers of roof accessories and roof-mounted equipment.**
  - 2. **Review and finalize construction schedule and verify availability of materials, installer's personnel, equipment, and facilities needed to make progress and avoid delays.**
  - 3. **Examine deck substrate conditions and finishes for compliance with requirements, including flatness and fastening.**
  - 4. **Review structural loading limitations of roof deck during and after roofing.**

5. Review base flashings, special roofing details, roof drainage, roof penetrations, equipment curbs, and condition of other construction that will affect roofing system.
6. Review governing regulations and requirements for insurance and certificates if applicable.
7. Review temporary protection requirements for roofing system during and after installation.
8. Review roof observation and repair procedures after roofing installation.
9. Review existing roof manufacturer's recycling program and return roofing system to the manufacturer for recycling.

#### 1.8 DELIVERY, STORAGE AND HANDLING

- A. Deliver roofing materials to Project site in original containers with seals unbroken and labeled with manufacturer's name, product brand name and type, date of manufacture, and directions for storing and mixing with other components.
- B. Store liquid materials in their original undamaged containers in a clean, dry, protected location and within the temperature range required by roofing system manufacturer. Protect stored liquid material from direct sunlight.
- C. Protect roof insulation materials from physical damage and from deterioration by sunlight, moisture, soiling, and other sources. Store in a dry location. Comply with insulation manufacturer's written instructions for handling, storing, and protecting during installation.
- D. Store roof materials and place equipment in a manner to avoid permanent deflection of deck.
- E. Store and dispose of solvent-based materials, and materials used with solvent-based materials, in accordance with requirements of local authorities having jurisdiction.

#### 1.9 WARRANTY

- A. Contractor's Warranty: The contractor shall warrant the roof application with respect to workmanship and proper application for two (2) years from the effective date of the warranty issued by the manufacturer.
- B. Manufacturer's Warranty: Must be no-dollar limit type and provide for completion of repairs, replacement of membrane or total replacement of the roofing system at the then-current material and labor prices throughout the life of the warranty. In addition the warranty must meet the following criteria:
  1. Warranty Period: 20 years from date issued by the manufacturer.
  2. Must provide adequate or sufficient drainage.
  3. Issued direct from and serviced by the roof membrane manufacturer.
  4. Transferable for the full term of the warranty.

## **PART 2 PRODUCTS**

### **2.1 MANUFACTURER**

- A. Manufacturer: Duro-Last®, which is located at: 525 Morley Drive, Saginaw, MI 48601.  
Telephone: 800-248-0280.
- B. All roofing system components to be provided or approved by Duro-Last
- C. Substitutions: Not permitted.

### **2.2 ROOFING SYSTEM COMPONENTS**

#### **A. Roofing Membrane:**

##### **1. Properties:**

- a. Type: Duro-Last 50-mil Membrane (Custom Fab: Regular Rolls)
- b. Roll Width: 60" (Installed widths may vary)
- c. Membrane Color: White
- d. Attachment Type: Mechanically Fastened

##### **2. Features:**

- a. ASTM D4434, Type III
- b. Fabric-reinforced, PVC, NSF/ANSI 347 Gold or Platinum Certification, and a product-specific third-party verified Environmental Product Declaration.
- c. Minimum recycle content 7% post-industrial and 0% post-consumer.
- d. Recycled at end of life into resilient flooring or concrete expansion joints.

#### **B. Insulation:**

##### **1. General Requirements**

- a. Provide preformed roof insulation boards that comply with requirements and referenced standards, as selected from manufacturer's standard sizes.
- b. Provide preformed saddles, crickets, and other insulation shapes where indicated for sloping to drain. Fabricate to slopes indicated.
- c. Provide roof insulation accessories approved by the roof membrane manufacturer and as recommended by insulation manufacturer for the intended use.

##### **2. Component:**

###### **a. Properties:**

- 1. Type: Duro-Guard® ISO II (Fiber-Reinforced Facer)
- 2. Board Application: Flat Stock
- 3. Size: 4' x 8'
- 4. Method: Min. Assembly R-Value: R-30

5. Attachment Type: Mechanically Fastened

b. Features:

1. Closed-cell polyisocyanurate foam core insulation board.
2. Complying with ASTM C1289, Type II, felt or glass-fiber mat facer on both major surfaces.
3. Provide Duro-Last factory-coated steel fasteners and metal or plastic plates meeting corrosion-resistance provisions in FMG 4470, designed for fastening insulation and/or insulation cover boards in conformance to specified design requirements.

C. Deck Type:

1. Properties:

a. Type: Structural Concrete Deck

D. Accessory Materials: Provide accessory materials supplied by or approved for use by Duro-Last®:

1. Sheet Flashing: Manufacturer's standard reinforced PVC sheet flashing.
2. Penetrations and Flashings: Manufactured using standard reinforced PVC membrane.
  - a. Duro-Last® Inside and Outside Corners
  - b. Duro-Last® Stack Flashing
  - c. Duro-Last® Curb Flashing
3. Drains, Scuppers, and Vents: Manufactured using standard reinforced PVC membrane.
  - a. Duro-Last® Two-Way Air Vent
  - b. Duro-Last® Drain Boot
  - c. Duro-Last® Drain Guard
  - d. Composite Drain Rings (CDRs)
4. Additional Roof Components: Compatible with roofing system and supplied by Duro-Last.
  - a. Roof Trak® III Walkway Pad (PVC)

## PART 3 EXECUTION

### 3.1 EXAMINATION

- A. Verify that the surfaces and site conditions are ready to receive work.
- B. Verify that the deck is supported and secured.
- C. Verify that the deck is clean and smooth, free of depressions, waves, or projections, and properly sloped to drains, valleys, eaves, scuppers or gutters.
- D. Verify that the deck surfaces are dry and free of standing water, ice or snow.
- E. Verify that all roof openings or penetrations through the roof are solidly set.

- F. If substrate preparation is the responsibility of another contractor, notify Architect of unsatisfactory preparation before proceeding.

### 3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Surfaces shall be clean, smooth, free of fins, sharp edges, loose and foreign material, oil, grease, and bitumen.
- D. Tearing off Existing Single-Ply System:
  - 1. Remove existing single-ply membrane and return to the manufacturer for recycling.

### 3.3 INSTALLATION

#### A. Insulation:

##### 1. General Requirements

- a. Install insulation in accordance with the roof manufacturer's requirements.
- b. Insulation shall be adequately supported to sustain normal foot traffic without damage.
- c. Where field trimmed, insulation shall be fitted tightly around roof protrusions with no gaps greater than ¼ inch.
- d. Tapered insulation boards shall be installed in accordance with the insulation manufacturer's shop drawings.
- e. No more insulation shall be applied than can be covered with the roof membrane by the end of the day or the onset of inclement weather.
- f. If more than one layer of insulation is used, all joints between subsequent layers shall be offset by at least 6 inches.

##### 2. Duro-Guard® ISO II (Fiber-Reinforced Facer)

- a. Use only fasteners, stress plates and fastening patterns accepted for use by the roof manufacturer. Fastening patterns must meet applicable design requirements.
- b. Install fasteners in accordance with the roof manufacturer's requirements. Fasteners that are improperly installed must be replaced or corrected.
- c. Install all layers in parallel courses with end joints staggered 50% and adjacent boards butted together with no gaps greater than ¼ inch.

#### B. Roofing Membrane:

##### 1. General Requirements

- a. Install membrane in accordance with the roof manufacturer's requirements.

- b. Cut membrane to fit neatly around all penetrations and roof projections.
- 2. Duro-Last 50-mil Membrane (Custom Fab: Regular Rolls)
  - a. Use only fasteners, stress plates and fastening patterns accepted for use by the roof manufacturer. Fastening patterns must meet applicable design requirements.
  - b. Install fasteners in accordance with the roof manufacturer's requirements. Fasteners that are improperly installed must be replaced or corrected.
  - c. Mechanically fasten membrane to the structural deck utilizing fasteners and fastening patterns in accordance with the roof manufacturer's requirements.
- C. Weld overlapping sheets together using hot air. Minimum weld width is 1-1/2 inches.
- D. Check field welded seams for continuity and integrity and repair all imperfections by the end of each work day.
- E. Flashings: Complete all flashings and terminations as indicated on the drawings and in accordance with the membrane manufacturer's requirements.
  - 1. Provide securement at all membrane terminations at the perimeter of each roof level, roof section, curb flashing, skylight, expansion joint, interior wall, penthouse, and other similar condition.
    - a. Do not apply flashing over existing thru-wall flashings or weep holes.
    - b. Secure flashing on a vertical surface before the seam between the flashing and the main roof sheet is completed.
    - c. Extend flashing membrane a minimum of 6 inches (152 mm) onto the main roof sheet beyond the mechanical securement.
    - d. Use care to ensure that the flashing does not bridge locations where there is a change in direction (e.g. where the parapet meets the roof deck).
  - 2. Penetrations:
    - a. Flash all pipes, supports, soil stacks, cold vents, and other penetrations passing through the roofing membrane as indicated on the Drawings and in accordance with the membrane manufacturer's requirements.
    - b. Utilize custom prefabricated flashings supplied by the membrane manufacturer.
    - c. Existing Flashings: Remove when necessary to allow new flashing to terminate directly to the penetration.
  - 3. Pipe Clusters and Unusual Shapes:
    - a. Clusters of pipes or other penetrations which cannot be sealed with prefabricated membrane flashings shall be sealed by surrounding them with a prefabricated vinyl-coated metal pitch pan and sealant supplied by the membrane manufacturer.
    - b. Vinyl-coated metal pitch pans shall be installed, flashed and filled with sealant in accordance with the membrane manufacturer's requirements.

- c. Pitch pans shall not be used where prefabricated or field fabricated flashings are possible.

**F. Roof Drains: Coordinate installation of roof drains and vents.**

**1. Drain Assemblies with Clamping Rings:**

- a. Remove existing roofing system materials from drain bowl and clamping ring.
- b. The membrane must extend beyond the inside of the clamping ring.
- c. Use a manufacturer supplied or approved sealant (1/2 tube minimum) between the membrane and drain bowl assembly.
- d. After the membrane is properly installed onto the bowl and the clamping ring set in place, all bolts securing the ring must be installed to provide constant, even compression on the sealant. If bolts are broken or missing, replacements must be installed.

**2. Drain Boots:**

- a. Remove existing flashing and asphalt at existing drains in preparation for sealant and membrane.
- b. Use a manufacturer supplied or approved sealant (1/2 tube minimum) to the outside of the drain boot and insert it into the drain.
- c. Fasten membrane around the perimeter of the drain with the same fastening pattern as the field membrane, no less than 1 fastener per drain.
- d. Install a pair of composite drain rings (CDRs) to compress the boot to the pipe. Ensure the CDR openings face in opposite directions.
- e. Secure the manufacturer's drain guard over the opening by heat welding the attachment tabs to the roof membrane.

**G. Edge Details:**

- 1. Provide edge details as indicated on the Drawings. Install in accordance with the membrane manufacturer's requirements.
- 2. Join individual sections in accordance with the membrane manufacturer's requirements.
- 3. Coordinate installation of metal flashing and counter flashing.
- 4. Manufactured Roof Specialties: Coordinate installation of copings, counter flashing systems, gutters, downspouts, and roof expansion assemblies.

**H. Walkways:**

- 1. Install walkways in accordance with the membrane manufacturer's requirements.
- 2. Provide walkways where indicated on the Drawings.
- 3. Install walkway pads at roof hatches, access doors, rooftop ladders and all other traffic concentration points regardless of traffic frequency. Provided in areas receiving regular traffic to service rooftop units or where a passageway over the surface is required.



4. Do not install walkways over flashings or field seams until manufacturer's warranty inspection has been completed.

I. Water Cut-Offs:

1. Provide water cut-offs on a daily basis at the completion of work and at the onset of inclement weather.
2. Provide water cut-offs to ensure that water does not flow beneath the completed sections of the new roofing system.
3. Remove water cut-offs prior to the resumption of work.
4. The integrity of the water cut-off is the sole responsibility of the roofing contractor.
5. Any membrane contaminated by the cut-off material shall be cleaned or removed.

3.4 FIELD QUALITY CONTROL

- A. The membrane manufacturer's representative shall provide a comprehensive final inspection after completion of the roof system. All application errors shall be addressed and final punch list completed.

3.5 PROTECTION

- A. Protect installed roofing products from construction operations until completion of project.
- B. Where traffic is anticipated over completed roofing membrane, protect from damage using durable materials that are compatible with membrane.
- C. Repair or replace damaged products after work is completed.

END OF SECTION

---